

MESHPORT BLUE

BLUETOOTH TO MESH INTERCOM ADAPTER FOR
GENERAL BLUETOOTH HEADSETS

QUICK START GUIDE

PRODUCT FEATURES

The easy-to-use MeshPort Blue will turn any General Bluetooth headsets into a more advanced and flexible communication device with the simple push of a button.

The MeshPort Blue for General Bluetooth headsets allows for seamless communication with other General Bluetooth headsets connected with MeshPort Blue.



Bluetooth® 5.0



Mesh Intercom™
up to 0.8 km (0.5 mi)*

* in open terrain

GETTING STARTED

1. Update this product for free with the latest firmware to fully enjoy the new advanced features built into this product. Visit **senaindustrial.com** to see how to update your product.
2. Users can follow Sena on Facebook, YouTube, Twitter and Instagram to receive the most up to date information on products, helpful tips and all other announcements regarding Sena products.



Sena Technologies Co., Ltd.

Customer Support: senaindustrial.com


TABLE OF CONTENTS

1.	ABOUT THE MESHPORT BLUE	6
1.1	Product Details	6
1.2	Package Contents	6
1.3	Installing the MeshPort Blue	7
1.3.1	Using the Belt Clip Mount	7
1.3.2	Using the Rubber Strap Mount	8
1.3.3	Attaching the Flat Surface Mount	8
2.	GETTING STARTED	9
2.1	Downloadable Sena Software	9
2.1.1	Sena MeshPort App	9
2.1.2	Running the Sena MeshPort App	9
2.1.3	Sena Device Manager	10
2.2	Powering On and Off	10
2.3	Charging	10
2.4	Checking the Battery Level	11
2.5	Adjusting the Mesh Intercom Volume	11
3.	MESH INTERCOM	12
3.1	What is Mesh Intercom	12
3.2	Bluetooth Pairing	13
3.2.1	Initially Bluetooth Pairing the MeshPort Blue	14

3.2.2	Bluetooth Pairing When the MeshPort Blue is Turned Off	14
3.2.3	Bluetooth Pairing When the MeshPort Blue is Turned On	15
3.3	Starting Mesh Intercom	15
3.3.1	Mesh Intercom On and Off	15
3.3.2	Mesh Intercom Reconnection	15
3.4	Using the Mesh in Open Mesh	16
3.4.1	Checking the Current Channel of the Meshport Blue	16
3.4.2	Channel Setting (Default: channel 1)	16
3.5	Muting the Microphone (Default: Unmute)	16
3.6	Mesh Intercom Repeater Mode	17
4.	TROUBLESHOOTING	18
4.1	Firmware Upgrade	18
4.2	Fault Reset	18
4.3	Factory Reset	18
	QUICK REFERENCE	19

1. ABOUT THE MESHPORT BLUE

1.1 Product Details

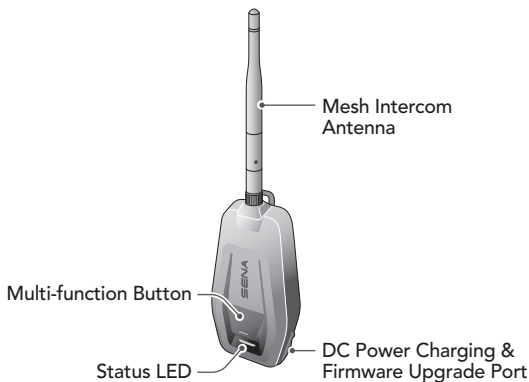

1.2 Package Contents

Main Unit		Mesh Intercom Antenna	
Belt Clip Mount		Rubber Strap Mount	
Flat Surface Mount		USB Power & Data Cable	


1.3 Installing the MeshPort Blue

Install the **MeshPort Blue** where the antenna is not blocked by the human body as much as possible.


When the human body is blocking the antenna, the **Mesh Intercom** signal strength will be weakened.

1.3.1 Using the Belt Clip Mount

1. Attach the belt clip mount to the back of the unit along the guide rail, as shown in the illustration, until you hear a click.



2. Mount the assembled unit in a convenient location, such as on your belt, with the antenna upwards.
3. Angle the antenna away from you to prevent it from interfering with your movement.



1.3.2 Using the Rubber Strap Mount

1. Place the rubber strap mount on the object, wind the rubber band around the object, and hang it on the hook.
2. Attach the rubber strap mount on the back of the main unit along the guide rail until you hear a click.

1.3.3 Attaching the Flat Surface Mount

1. Locate an appropriate surface for attaching the flat surface mount, clean the mounting surface with a moistened towel, and allow it to dry thoroughly.
2. Peel off the cover of the adhesive tape of the flat surface mount and attach it to the surface.
3. Attach the flat surface mount on the back of the main unit along the guide rail until you hear a click.

Note: Make sure that the main unit sticks on the surface firmly. Maximum adhesion occurs after 24 hours.

2. GETTING STARTED

2.1 Downloadable Sena Software

2.1.1 Sena MeshPort App

You can use the **Sena MeshPort App** without pairing your **Smartphone** to the **MeshPort Blue**.

- Download
 - Android: Google Play Store > **Sena MeshPort**
 - iOS: App Store > **Sena MeshPort**

2.1.2 Running the Sena MeshPort App


1. Turn on the product.
2. Press and hold the **Multi-function Button** for **5 seconds**.
3. Launch the **Sena MeshPort App** on your **Smartphone**.
4. Scan the product in the app.
 - When you launch the app, the product is automatically scanned.
 - Tap the Scan icon (Q) to manually scan the product.
5. After scanning is complete, select the scanned product in the app.

Note:

- If the product has not been scanned in the app, please update the product to the latest firmware.

• How to identify the scanned product in the app

You can identify the product by the **six-letter code** on the label on the back of your product.



2.1.3 Sena Device Manager

The **Sena Device Manager** allows you to upgrade the firmware from your PC or Apple computer. Download the **Sena Device Manager** from senaindustrial.com.

2.2 Powering On and Off

To power on the **MeshPort Blue**, press and hold the **Multi-function Button** for **1 second**. The LED flashes blue.

To power off the **MeshPort Blue**, press and hold the **Multi-function Button** for **1 second**. The LED flashes red once.

2.3 Charging

The **MeshPort Blue** can be charged using many common methods via the supplied USB power & data cable. The LED turns red while the **MeshPort Blue** is charging and turns blue when it is fully charged. Depending upon the charging method, the **MeshPort Blue** will be fully charged in about 2 hours.

Note: Any 3rd party USB charger can be used with Sena products if the charger is approved by either the FCC, CE, IC or other locally approved agencies that Sena accepts.

2.4 Checking the Battery Level

When the **MeshPort Blue** is powering on, the red LED flashes rapidly indicating the battery level.

4 flashes = High, 70~100%

3 flashes = Medium, 30~70%

2 flashes = Low, 0~30%

Note:

- The battery performance may be reduced over time with usage.
- Battery life may vary depending on conditions, environmental factors, functions of the product in use, and devices used with it.

2.5 Adjusting the Mesh Intercom Volume

You can raise or lower the **Mesh Intercom** volume by using the **Sena MeshPort App**.

Mesh Intercom volume is set and maintained even when the **MeshPort Blue** is rebooted.

3. MESH INTERCOM

3.1 What is Mesh Intercom


Sena proposes using **Mesh Intercom™**, which provides instant and effortless communication without a pre-grouping process.

Mesh Intercom allows users to connect and communicate with nearby users without the need to pair each **MeshPort Blue** together.

The working distance between each **MeshPort Blue** in **Mesh Intercom** can be up to 0.8 km (0.5 mi) in open terrain. In open terrain, the **Mesh** can be extended up to 3.2 km (1.9 mi) between a minimum of 6 users.

Open Mesh is an open group intercom function. Users can freely communicate with each other in the same Open Mesh channel.

It can connect with a virtually unlimited number of users in each channel.

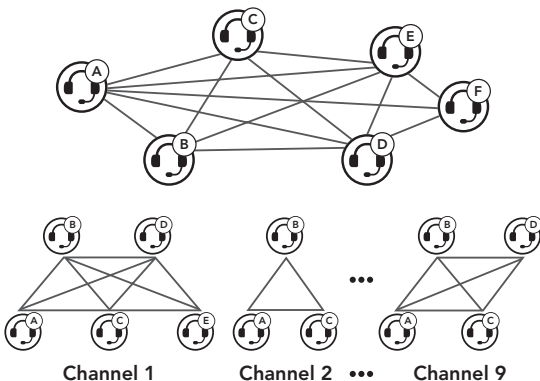

3.2 Bluetooth Pairing

General Bluetooth headset can be connected to the **MeshPort Blue** if they support the Bluetooth Hands-Free Profile (HFP). Before using **Mesh Intercom**, you will need to pair a compatible **General Bluetooth headset** for the first time. The Bluetooth pairing operation is only required once for each **General Bluetooth headset**. The **MeshPort Blue** remains paired with the **General Bluetooth headset** and automatically connects to the paired **General Bluetooth headset** again when they are within range of each other.

Note:

- The **MeshPort Blue** supports pairing with only one **General Bluetooth headset**.
- The **Mesh Intercom** audio quality depends on the connected **General Bluetooth headset**.
- Some **General Bluetooth headsets** may not work properly when connected to **MeshPort Blue**.

There are three ways to pair the **General Bluetooth headset**.

3.2.1 Initially Bluetooth Pairing the MeshPort Blue

The **MeshPort Blue** will automatically enter the phone pairing mode when you **initially turn on** the **MeshPort Blue** or in the following situations:

- Rebooting after executing **Factory Reset**
1. Press and hold the **Multi-function Button** for **1 second** (Power On).
 2. The LED will flash red and blue alternately.
 3. Enter **Phone Pairing** of the **General Bluetooth headset** (refer to the Manual for the **General Bluetooth headset** you want to use). They will automatically connect to each other.
 4. When the LED flashes green of the **MeshPort Blue**, the pairing is completed. When the pairing is completed, **Mesh Intercom** will turn on automatically.

3.2.2 Bluetooth Pairing When the MeshPort Blue is Turned Off

1. To enter **Bluetooth Pairing**, press and hold the **Multi-function Button** for **5 seconds** until the LED flashes red and blue alternately when the **MeshPort Blue** is turned off.
2. Enter **Phone Pairing** of the **General Bluetooth headset** (refer to the Manual for the **General Bluetooth headset** you want to use). They will automatically connect to each other.
3. When the LED flashes green of the **MeshPort Blue**, the pairing is completed. When the pairing is completed, **Mesh Intercom** will turn on automatically.

3.2.3 Bluetooth Pairing When the MeshPort Blue is Turned On

1. To enter Bluetooth Pairing, press and hold the **Multi-function Button** for **5 seconds** until the LED flashes red and blue alternately when the **MeshPort Blue** is turned on.
2. Enter **Phone Pairing** of the **General Bluetooth headset** (refer to the Manual for the **General Bluetooth headset** you want to use). They will automatically connect to each other.
3. When the LED flashes green of the **MeshPort Blue**, the pairing is completed. When the pairing is completed, **Mesh Intercom** will turn on automatically.

3.3 Starting Mesh Intercom

When **Mesh Intercom** is on, the **MeshPort Blue** will automatically connect to nearby **MeshPort Blue** users and allow them to talk to each other.

3.3.1 Mesh Intercom On and Off

1. To start **Mesh Intercom**, tap the **Multi-function Button**. The LED flashes green.
2. To terminate **Mesh Intercom**, tap the **Multi-function Button**.

3.3.2 Mesh Intercom Reconnection

If Bluetooth connection between the **MeshPort Blue** and a **General Bluetooth headset** is disconnected, tap the **Multi-function Button** to reconnect the two devices.

3.4 Using the Mesh in Open Mesh

When **Mesh Intercom** is enabled, the **MeshPort Blue** will be in **Open Mesh** (default: channel 1) initially.

3.4.1 Checking the Current Channel of the Meshport Blue

Triple-tap the **Multi-function Button**. Then you will hear a voice prompt, "**Open Mesh, Channel #**" through the paired headset speakers.

3.4.2 Channel Setting (Default: channel 1)

If the **Open Mesh** communication experiences interference because other groups are also using **channel 1 (default)**, change the channel. You can select from channels 1 to 9.

- You can only change the channel through the **Sena MeshPort App**.

3.5 Muting the Microphone (Default: Unmute)

1. To **mute** the microphone, double tap the **Multi-function Button**. The purple LED will flash and you will hear a voice prompt, "**Mic off.**"
2. To **unmute** the microphone, double tap the **Multi-function Button**. The purple LED will flash twice and you will hear a voice prompt, "**Mic on.**"

Note:

1. The mute and unmute function only works if **Mesh Intercom** is on.
2. After turning off your **MeshPort Blue** or turning off the **Mesh Intercom**, the **Mute** setting will return to default (**Unmute**).
3. The mute and unmute function does not work in **Mesh Intercom Repeater Mode**.

3.6 Mesh Intercom Repeater Mode

The **MeshPort Blue** can be used as a **Mesh Intercom Repeater** without **Bluetooth pairing** with a **Bluetooth headset**.

1. Triple tap the **Multi-function Button** during the **Bluetooth pairing**. (Bluetooth pairing, referring to section 3.2 on page 13.)
2. The green LED will flash 3 times and the **MeshPort Blue** will operate in **Mesh Intercom Repeater Mode**.
 - In **Mesh Intercom Repeater Mode**, **Mesh Intercom** will start automatically when the power is on.

Note:

- In **Mesh Intercom Repeater Mode**, only the following features can be executed:
 - **Power on/off**
 - **Factory Reset**
 - Change the channel through the **Sena MeshPort App**.
- If you want to pair with the **Bluetooth headset**, execute **Factory Reset** and proceed with **Bluetooth pairing**.


4. TROUBLESHOOTING

4.1 Firmware Upgrade

The **MeshPort Blue** supports firmware upgrades. You can update the firmware using the **Sena Device Manager**.

4.2 Fault Reset

When the **MeshPort Blue** is not working properly or is in faulty status for any reason, you may reset by pushing the **Pin-hole Reset Button** at the back of the main unit.



4.3 Factory Reset

If you want to restore the **MeshPort Blue** to factory default settings, execute **Factory Reset**. Press and hold the **Multi-function Button** for **11 seconds** until the LED flashes white, the **MeshPort Blue** automatically restores the default settings and turns off.

QUICK REFERENCE

Type	Operation	Button Command
Basic Function	Power on/off	Press and hold the Multi-function Button for 1 second
Bluetooth Pairing		- Press and hold the Multi-function Button for 5 seconds when the MeshPort Blue is turned off - Press and hold the Multi-function Button for 5 seconds when the MeshPort Blue is turned on
Mesh Intercom™	Mesh Intercom on/off	Tap the Multi-function Button
	Mute/Unmute Mic	Double tap the Multi-function Button
	Check the channel	Triple-tap the Multi-function Button
	Repeater Mode	Triple tap the Multi-function Button during the Bluetooth pairing
Factory Reset		Press and hold the Multi-function Button for 11 seconds



Copyright 2024 Sena Technologies Co., Ltd.
All rights reserved.

© 1998–2024 Sena Technologies Co., Ltd. All rights reserved.

Sena Technologies Co., Ltd. reserves the right to make any changes and improvements to its product without providing prior notice.

Sena™ is a trademark of Sena Technologies Co., Ltd. or its subsidiaries in the USA and other countries. SF1™, SF2™, SF4™, SFR™, SRL™, SRL2™, SRL3™, SRL-EXT™, SRL-Mesh™, Momentum™, Momentum INC™, Momentum Lite™, Momentum Pro™, Momentum INC Pro™, Momentum EVO™, Cavalry™, Latitude SR™, Latitude SX™, Latitude S1™, 30K™, 33i™, 50S™, 50R™, 50C™, 5S™, 5R™, 5R LITE™, 20S EVO™, 20S™, 10S™, 10C™, 10C PRO™, ProRide EVO™, 10C EVO™, 10U™, 10Upad™, 10R™, ACS10™, ACS-RAM™, B10™, C1™, C10™, C20™, CAST™, 3S™, 3S PLUS™, SMH5™, SMH5-FM™, SMH5 MultiCom™, SMH10™, SMH10R™, SPH10™, SPH10H-FM™, Savage™, Prism Tube Wi-Fi™, Prism™, Bluetooth Audio Pack for GoPro®, IMPULSE™, FURY™, R1™, R1 EVO™, R1 EVO CST™, R2™, R2 EVO™, R2X™, M1™, M1 EVO™, S1™, RUMBA™, RC1™, RC3™, RC4™, STRYKER™, Handlebar Remote™, Wristband Remote™, PowerPro Mount™, Powerbank™, FreeWire™, Wi-Fi Docking Station™, Wi-Fi Sync Cable™, Wi-Fi Adapter™, +mesh™, +Mesh Universal™, MeshPort Blue™, MeshPort Red™, MeshPort Black™, Econo™, OUTLANDER M™, OUTRUSH™, OUTRUSH R™, OUTSTAR™, OUTSTAR S™, OUTFORCE™, OUTRIDE™, OUTRUSH M™, EcoCom™, Parani A10™, Parani A20™, Parani M10™, pi™, Snowtalk™, Snowtalk2™, SR10™, SR10i™, SM10™, SPIDER RT1™, SPIDER ST1™, X1™, X1 Pro™, X1S™, EXPAND™, EXPAND BOOM™, EXPAND MESH™, Bluetooth Mic & Intercom™, Tufftalk™, Tufftalk Lite™, Tufftalk M™, NAUTITALK Bosun™, NAUTITALK N2R™ are trademarks of Sena Technologies Co., Ltd. or its subsidiaries. These trademarks may not be used without the express permission of Sena.

GoPro® is a registered trademark of Woodman Labs of San Mateo, California. Sena Technologies Co., Ltd. ("Sena") is not affiliated with Woodman Labs, Inc. The Sena Bluetooth Pack for GoPro® is an aftermarket accessory specially designed and manufactured by Sena Technologies Co., Ltd. for the GoPro® Hero3 and Hero4 allowing for Bluetooth capabilities.

The Bluetooth® word mark and logos are owned by the Bluetooth SIG, Inc. and any use of such marks by Sena is under license. iPhone® and iPod® touch are registered trademarks of Apple Inc.

Address: 152 Technology Drive Irvine, CA 92618